

Dahua Access Control Temperature Monitoring

Face Recognition/Temperature Monitoring/Integration



Temperature Monitoring
Distance: 0.3m-0.7m



Temperature Accuracy:
 $\pm 0.3^{\circ}\text{C}$





Temperature
Abnormal Alarm



Large Storage Capacity

Key Features

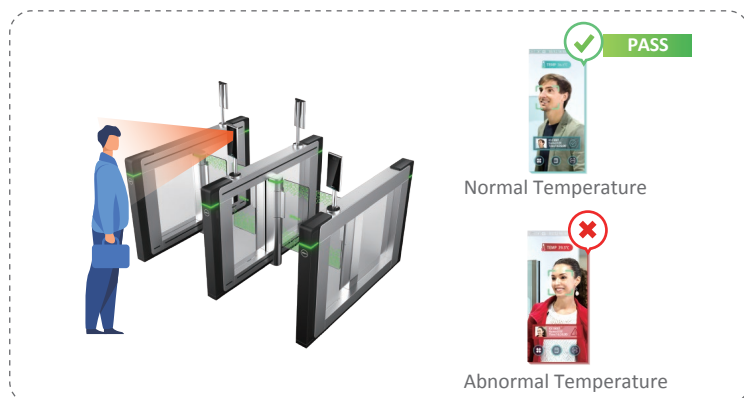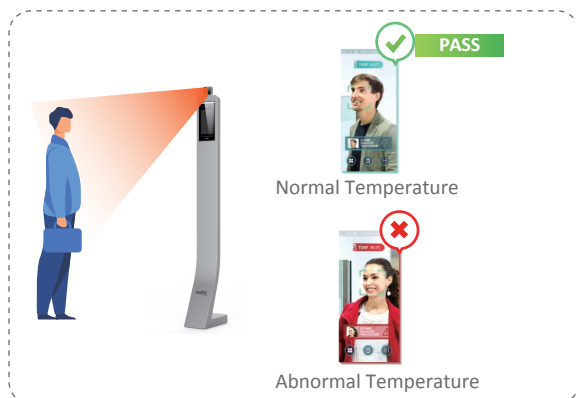

- Face recognition is integrated with body temperature monitoring, no additional staff required.
- Non-contact access to reduce cross-infection.
- Large storage of face images and temperature information for easy back-tracking.
- Fast access to prevent congestion.


Application Scenario



Commercial Building



Apartment



School



Factory

Products



DHI-ASI7213X-T/
DSS-Express

- Temperature Accuracy: $\pm 0.3^{\circ}\text{C}$
- Temperature Monitoring Distance: 0.3m ~ 0.7m
- Sound Prompt: Abnormal temperature alarm



DHI-ASI7223X-A-T/
DHI-ASGB8xxX/DSS-Express

- Temperature Accuracy: $\pm 0.3^{\circ}\text{C}$
- Temperature Monitoring Distance: 0.3m ~ 0.7m
- Sound Prompt: Abnormal temperature alarm



DHI-ASI7213X-T/
ASF172X/DSS-Express

- Temperature Accuracy: $\pm 0.3^{\circ}\text{C}$
- Temperature Monitoring Distance: 0.3m~0.7m
- Sound Prompt: Abnormal temperature alarm

* Design and specifications are subject to change without notice.

Ver.1, Apr. 2020

DAHUA TECHNOLOGY

No.1199 Bin'an Road, Binjiang District, Hangzhou, China. 310053

Tel: +86-571-87688883 Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuasecurity.com

